

STW120


, 2, 3, 4

PC

4-20mA

HART

PC

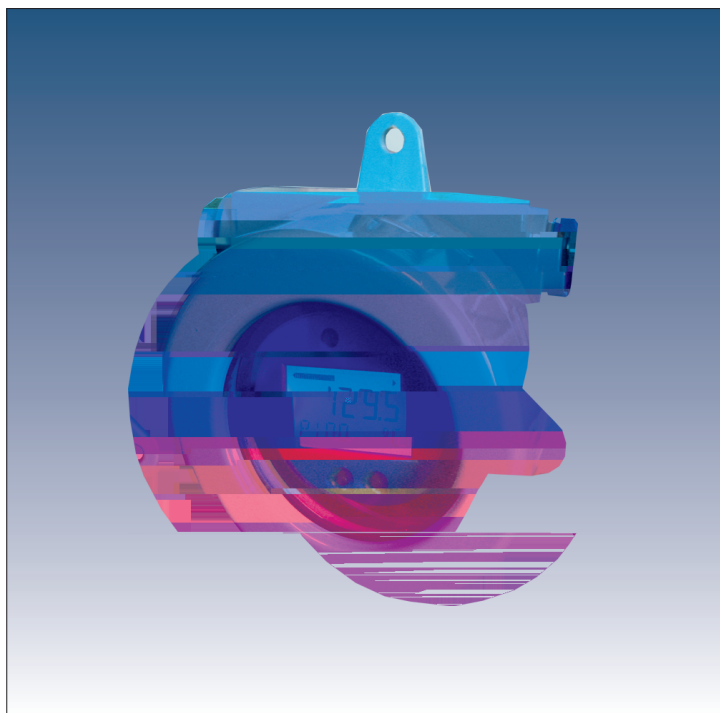

EN61326-1 CE

型号	类型	测量范围
热电阻 (RTD)	Pt100	-200°C to 400°C
	Pt500、 Pt1000	-200°C to 250°C
	Cu50、 Cu100	-50°C to 150°C
	Ni100、 Ni500	-60°C to 80°C
	Ni1000	-60°C to 150°C
电阻信号 (Ω)	电阻 Ω	0 to 400 Ω
		0 to 2000 Ω
		0 to 10000 Ω
热电偶(TC)	B	0 to 1820
	E	-270 to 1000°C
	J	-210 to 1200°C
	K	-270 to 1372°C
	N	-270 to 1300°C
	R	-50 to 1768°C
	S	-50 to 1768°C
	T	-270 to 400°C
电压信号 (mV)	电压(mV)	-10 to 75mV
		-100 to 100mV
		-100 to 500mV
		-100 to 2000mV

