


DRYCAP®

DM70



DRYCAP®

DM70

DRYCAP®

DM70

DM70

MI70Link

MI70Link

Windows
USB

DM70

DM70

A

B

SF6

C

B

C

"

"

DM70

DM70

DRYCAP®

DSS70A

DM70

LCD

DMT242

DMT132
DMT340


DMT143

DMT152

DM70

DMP74A

-50... +60 °C

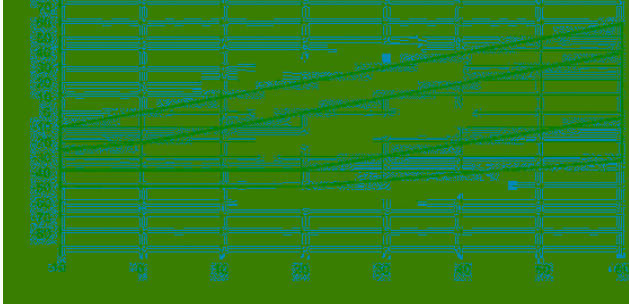

A -40... +60 °C ± 2 °C

0.2 m/s 1 bar +20 °C 63% [90%]

0 -40 °C T_d 20s [120s]

-40 0 °C T_d 10s [20s]

DRYCAP® 180S

+20 °C -10... +60 °C

± 0.2 °C

± 0.005 °C/°C

Pt100RTD F0.1 IEC 60751

ppm ppm

-10... +60 °C

DMP74A DMP74B 0... 20 bara (0... 290 psia)

DMP74C 0... 10 bara (0... 150 psia)

EMC EN61326-1

(AISI 316L)

(AISI 316L)

G1/2" ISO228-1

U

IP IP65 (NEMA 4)

350g

DMP74B

DMP74C

SF6

-70... +30 °C



DMP74C SF6 ± 2 °C -50 °C T_d

B C -60... +20 °C ± 2 °C

0.2 m/s 1 bar +20 °C 63% [90%]

0 -60 °C T_d 50s [340s]

-60 0 °C T_d 10s [20s]

DRYCAP® 180M

+20 °C -10... +60 °C

± 0.2 °C

± 0.005 °C/°C

Pt100RTD F0.1 IEC 60751


ppm ppm

MI70

	-10... +40°C
	0... 100%RH
	-40... +70°C
	2
	4 IEC LR6 AA
PC	USB MI70Link
	0... 1 VDC
	0.6mV
	0.2%
	0.002%/°C
	10k
	IP54
	ABS/PC
	400g
EMC	EN61326-1
	<ul style="list-style-type: none"> LCD 16mm
	2700
	1 12
	1 ...
	0.01 %RH 0.01 °C/°F 0.01 hPa 0.01 a _w 10ppm/0.01 % CO ₂

	MI70CASE3
	MI70SOFTCASE
USB	MI70Link 219687
	MI70Link MI70LINK 27168ZZ
10m	213107SP
	DSS70A
DMT242	27160ZZ
DMT340	211339
DMT152 DMT143 DMT132	219980SP

	+20°C	48
--	-------	----

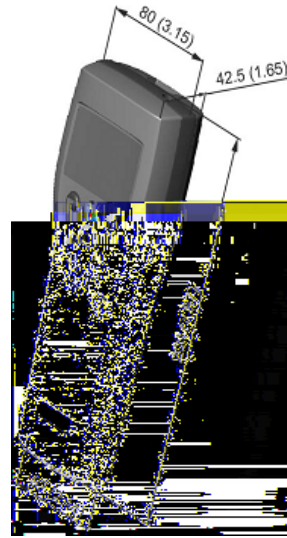

MI70

