



-
-
- < 2s
- 0... 100% RH
- - 40... +60 °C
- 4 M8
- IP54
- INTERCAP®
- RS-485
- Modbus® RTU
-

INTERCAP®

HMP63

M8

M8

HMP113

HMP63
INTERCAP®

RS-485

Modbus


HMP63

HMP63

PC/ABS

0 ... 100%RH	
0 ... +40 °C	± 3 %RH (0 ... 90%RH) ± 5 %RH (90 ... 100%RH)
- 40 ... 0 °C +40 ... +60 °C	± 5 %RH (0 ... 90%RH) ± 7 %RH (90 ... 100%RH)
INTERCAP®	
- 40 ... +60 °C	
+10 ... +30 °C (+50 ... +86 °F) - 40 ... +10 °C +30 ... +60 °C	± 0.5 °C ± 0.6 °C
20 °C	± 0.2 % ± 0.01 % / °C ± 0.006 % / °F
	1 mA 5 mA
1)	
1 V/2.5 V	5 ... 28 VDC
5 V	8 ... 28 VDC
	8 ... 28 VDC
	5 ... 28 VDC
	13.5 ... 16.5 VDC 4
	2
	1 s
2	0 ... 1 VDC / 0 ... 2.5 VDC / 0 ... 5 VDC / 1 ... 5 VDC
	4 ... 20 mA
	RS-485 2 Modbus RTU
0 ... 1 V	R _L 10k
0 ... 2.5 V / 0 ... 5 V	R _L 50k
1)	
	- 40 ... +60 °C
EMC	EN 61326-1

IP	IP54 ¹⁾	
	4 M8 (IEC 60947-5-2)	
	PC/ABS	
	PC	
	FEP	
	9 g	
0.3 m	20 g	
1)		
INTERCAP®	1	15778HM
INTERCAP®	10	INTERCAPSET-10PCS
	DRW240185SP	
	ASM210856SP	
	HM47280SP	
PTFE	219452SP	
10	226067	
	226061	
5	ASM213382SP	
3	HM40	DRW238590SP
4 ... 20 mA	UI-CONVERTER-1CB	
	225979	
USB	219690	
HM70	219980SP	
+60 °C 0.3 m	HMP50Z032SP	
+60 °C 1.2 m	HMP50Z120	
+60 °C 3 m	HMP50Z300SP	
+80 °C 1.5 m	225777SP	
+80 °C 3 m	225229SP	
+180 °C 1.5 m FEP	238025	
+180 °C 3 m FEP	226902SP	

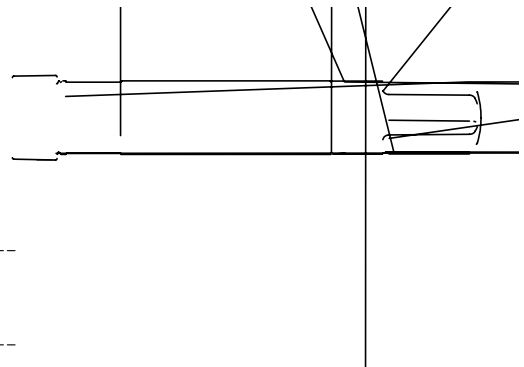

尺寸：毫米

